


FMG ↔ FGT communcation



FMG ↔ FGT communcation

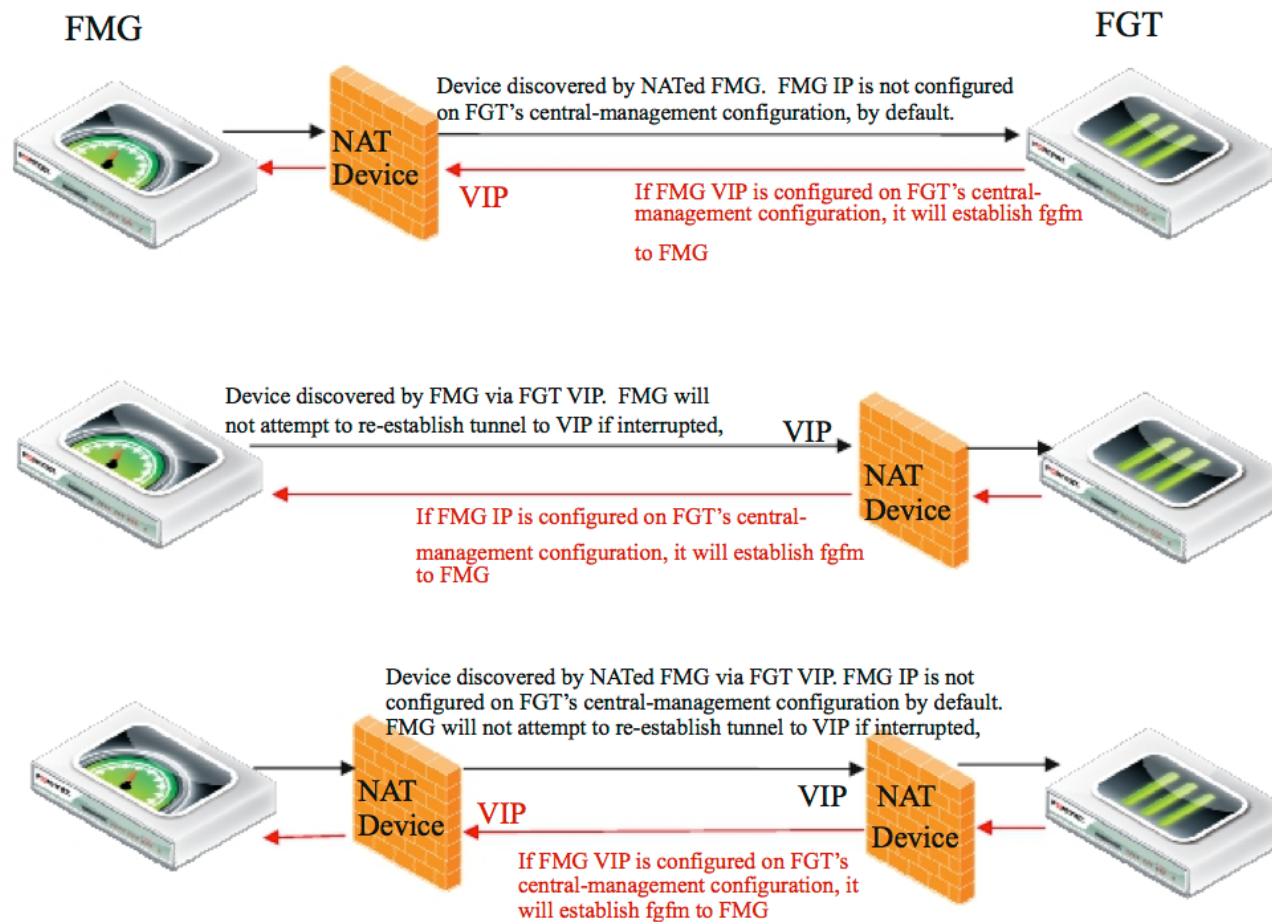

- Device discovery and fgfm tunnel establishment default behavior with NAT situations
 - NATed FMG
 - FMG can discover FGT
 - Only the FMG will try to establish fgfm tunnel if torn down, since the FMG's NATed IP will not be configured on FGT's Central Management configuration by default.
 - FGT can announce itself to FMG via a VIP
 - FMG VIP to be manually (or automatically) configured on FGT central-management section
 - Both FMG and FGT will try to establish fgfm tunnel if torn down.
 - NATed FGT
 - FMG can discover FGT via VIP
 - FMG will NOT try to establish fgfm tunnel if torn down. Current 'normal' behavior.
 - Only the FGT will try to establish fgfm tunnel if torn down
 - FGT can announce itself to FMG
 - The FGT will try to establish fgfm tunnel if torn down
 - NATed FMG & FGT
 - FMG can discover FGT via VIP
 - Both FMG and FGT will NOT try to establish fgfm tunnel if torn down
 - FGT can announce itself to FMG via a VIP
 - Only the FGT will try to establish fgfm tunnel if torn down
 - FMG VIP to be manually (or automatically) configured on FGT central-management section